



SWIMMING POOL
A Versatile Collection of Swimming Pool Tark and Cladding Tiles

SWIMMING POOL

30cmx30cm. 12 x12 inches Rrctificado Rectified



SP-1




SP-2




SWIMMING POOL

30cmx30cm. 12 x12 inches **Rrectificado** Rectified

- Floor
- Wall
- Bed Body
- Satin
- 2mm
- Rectified
- Inkjet
- Bibb
- 7.5mm
- Waterproof

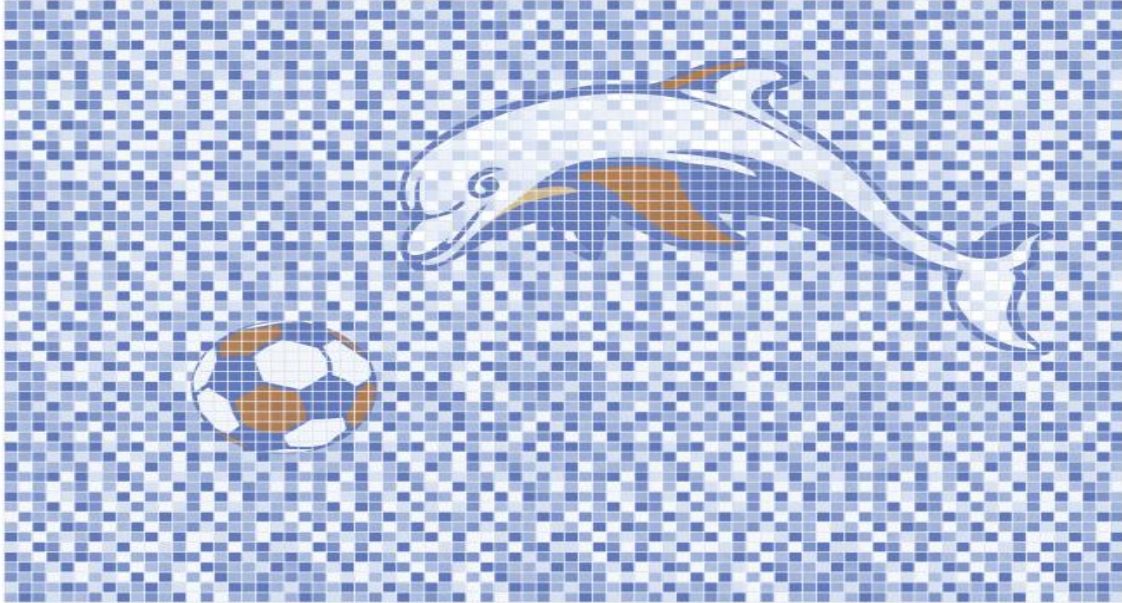


DOLPHIN

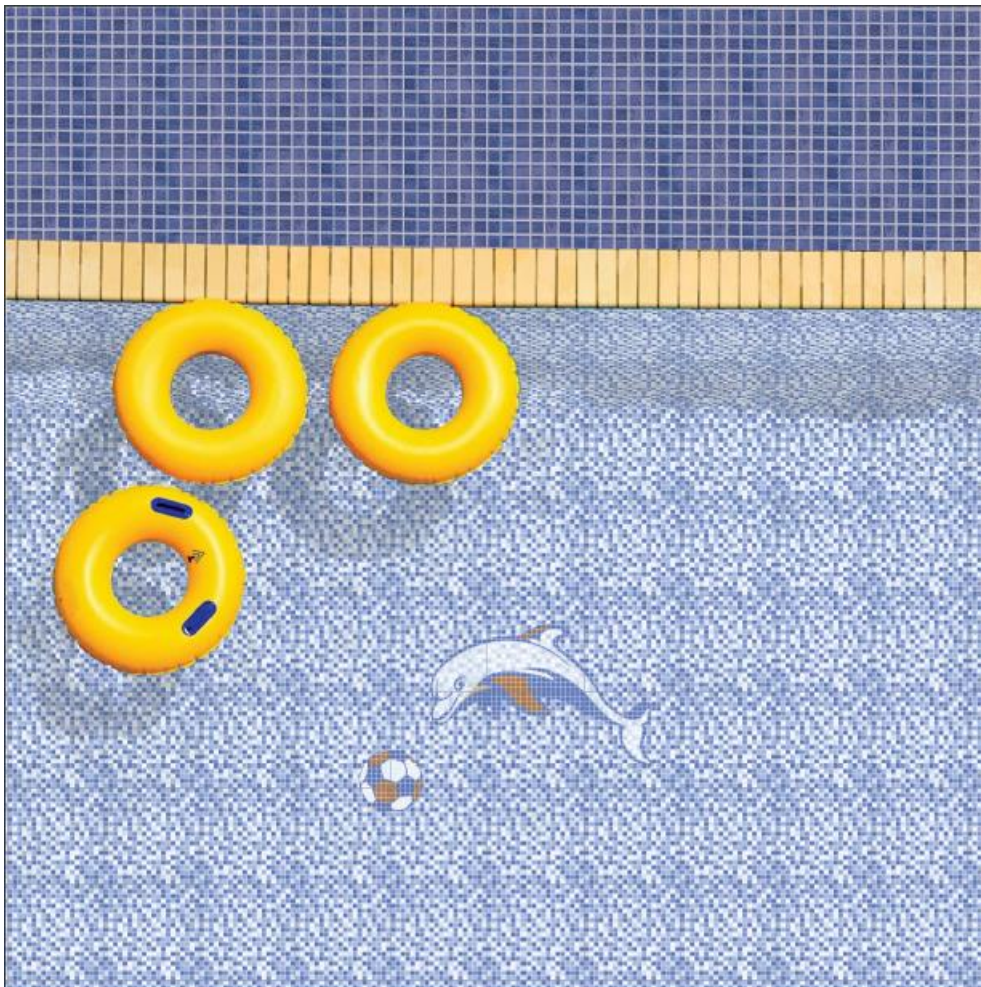

SWIMMING POOL

30cmx30cm. 12 x12 inches Rrectificado Rectified




SP-11 **NEW**



SWIMMING POOL

30cmx30cm. 12 x12 inches Rrectificado Rectified




SP-12



SWIMMING POOL

30cmx30cm. 12 x12 inches Rrectificado Rectified

- Floor
- Wall
- Red Body
- Salin
- 2mm
- Rectified
- Inkjet
- Bibb
- 7.5mm
- Waterproof




SP-13 **NEW**





SWIMMING POOL

30cmx30cm. 12 x12 inches Rrectificado Rectified




SP-21

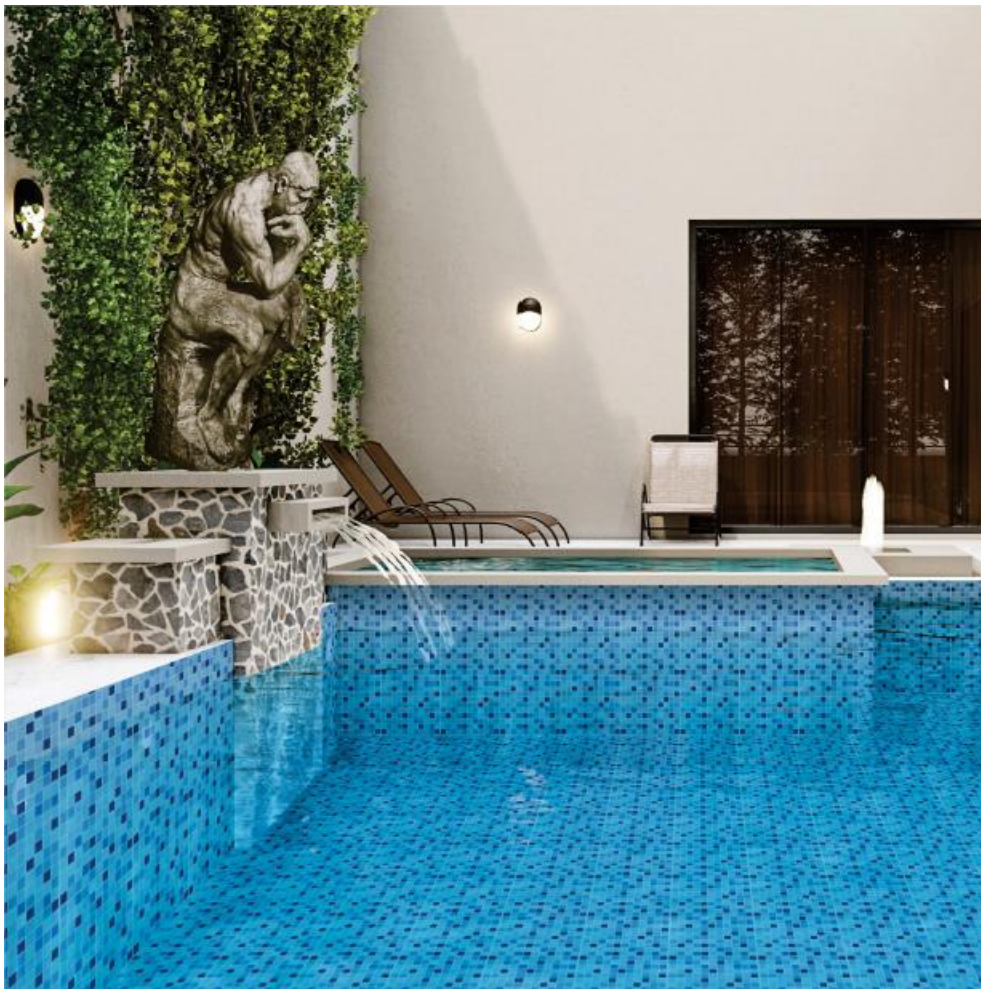



SWIMMING POOL

30cmx30cm. 12 x12 inches Rrectificado Rectified




SP-22

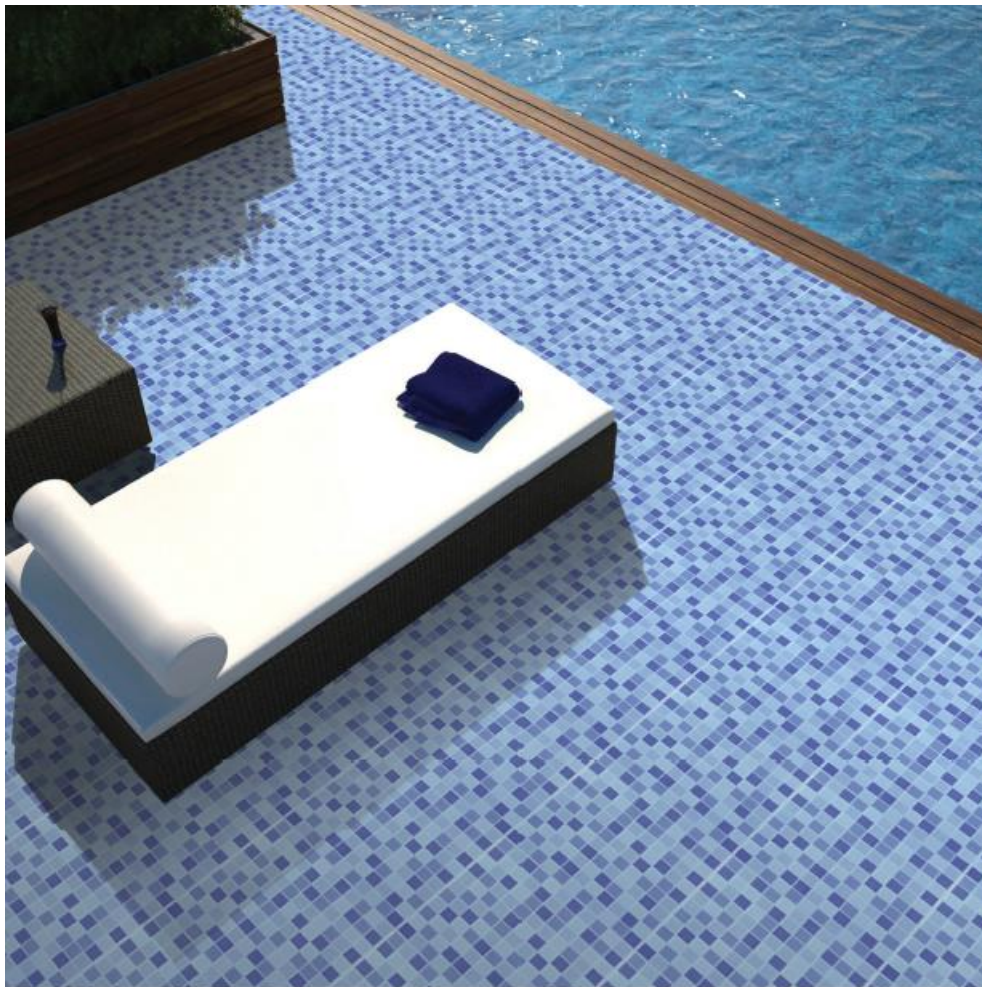



SWIMMING POOL

30cmx30cm. 12 x12 inches Rrctificado Rectified



SP-23 **NEW**

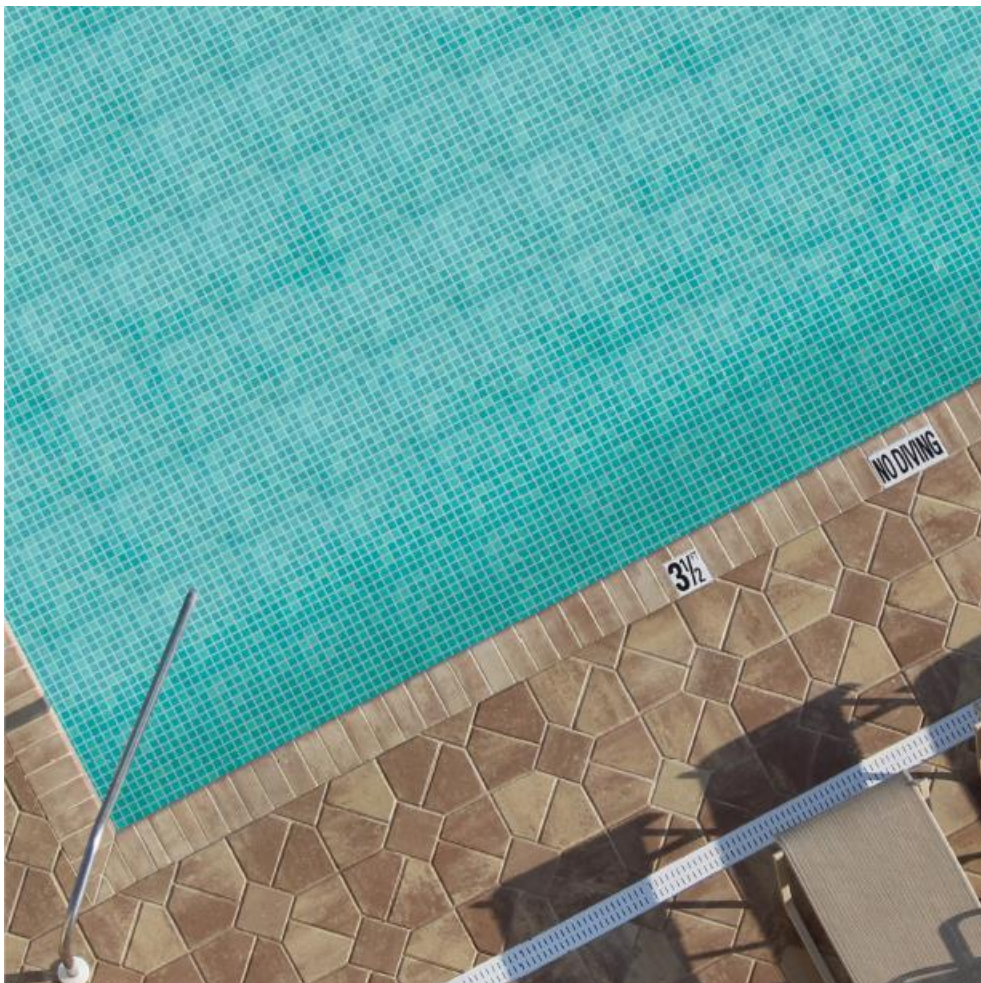

Technical Specification

Sr. No.	Particulars	Standard as per ISO 13006/EN 176 Group B1b	OUR VALUE	Method of Testing
1	Deviation in length	± 0.50 %	± 0.30 %	EN 98
2	Deviation in Thickness	± 5 %	± 3 %	EN 98
3	Straightness of Side	± 0.50 %	± 0.30 %	EN 98
4	Rectangularity	± 0.60 %	± 0.30 %	EN 98
5	Surface Flatness	± 0.50%	± 0.30 %	EN 98
6	Water Absorption	6-10 %	8 %	ISO 10945.3 EN 98
7	Mohs Hardness	> 5	> 5	EN 101
8	Flexural Strength	> 35 N/Sq. mm	> 39 N/Sq. mm	—
9	Abrasion Resistance	As Specified by Manu.	PE I 3	ISO 10545.6 EN 102
10	Frost Resistance	Frost proof	Frost proof	ISO 10545 - 11
11	Chemical Resistance	No damage	No damage	ISO 10545 - 18
12	Thermal Shock Resistance	No damage	No damage	ISO 10545 - 9
13	Color Resistance	No damage	No damage	—
14	Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
15	Moisture Expansion	Nil	Nil	ISO 10545 - 10
16	Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note: Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instruction on the cartons of the tiles as no responsibility can be accepted by the company once they have been fixed.

PACKING DETAILS

Packing Details (Overseas Market)									
Size	Product	Piece/Box	Coverage Sq. Mt.	Weight	Box/Container	Sqm./Container	Box/Pallet	Sqm./Pallet	Pallet/Container
30 x 30cm.	Digital Floor Tiles	9	0.81	12.0 Kg.	2290	1854	108	87.48	21